

Dramatic reduction in EMI filter footprint

Common- and differential-mode filtering in same package

2X

Filter Performance

2X

Reliability

50%

Size & Weight



Spec Description	Spec	Unit
RF Range (min)	30	KHz
RF Range (max)	1	GHz
Voltage (DC)	200	Volt
Voltage (AC) 400 Hz	120	Volt
Current (by model)	1-10	Amp
DCR (by model)	.008 - .25	ohm


Improved mid band common performance plus differential mode

Revolutionary dual mode filtering from 30KHz to 1GHz in a panel mount package.

- Common Mode filtering
- Differential Mode filtering
- DC to 400Hz operation
- Switching, Motor, processor noise reduction
- Meets Mil-F-15733 Environmental Requirements

Radical interchangeability

- Popular .690 compact housing size
- Quick threaded installation
- 50% size and weight reduction over two discrete filters
- (customizable values available)

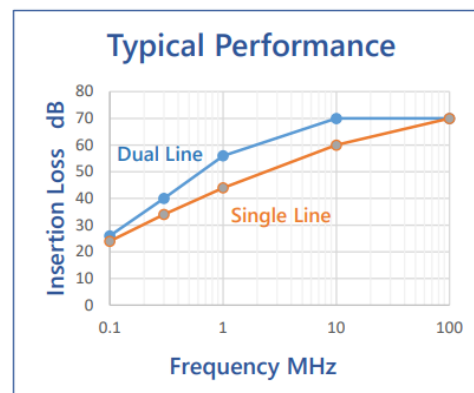

EMI+

Bringing common & differential mode filtering in a single package for EMI compliance